



INSTALLATION SHEET

ITEM: 97020

CODE: 800540

BULL REMOVABLE GRIDDLE


INSTALLING REMOVABLE GRIDDLE:

1. Remove all grill grates.
2. Center thick part of the removable griddle over 2 burners.
3. Remove warming rack (optional).

IMPORTANT:

- Grill grates should not be used next to drop-in griddle do to excessive heat displacement.
- Griddle should not be placed flush against and side of grills as shown in diagram below. Allowing a gap ensures heat can escape without damaging the sides of the grill by trapping excessive heat.
- Leave a minimum gap of 44.5mm from the griddle sides to the grill sides to allow heat to escape.

INSTALLATION DIAGRAM:

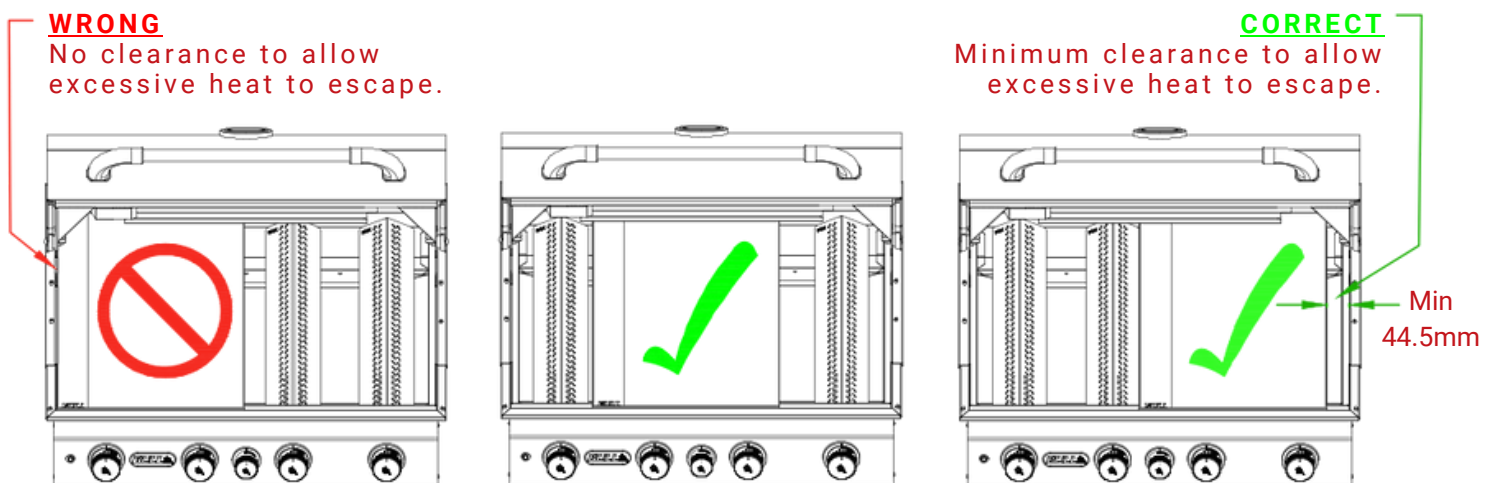

THERE SHOULD ALWAYS BE A MINIMUM GAP OF 44.5MM
FROM THE GRIDDLE SIDES TO THE GRILL SIDES